

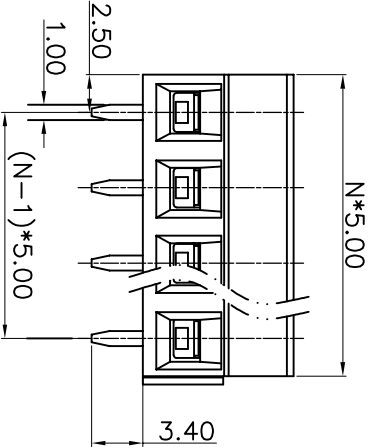


2 REVISION RECORD 1

REV	ECN.	DESCRIPTION	DRFT	DATE



NOTE 1:

UL标准 (UL Standard)

- 1. 额定电压与电流: 300V/15A
Rated voltage/Rated current:300V/15A
- 2. 功率耐压: AC2000V/Min
Wi withstanding Voltage :AC2000V/Min
- 3. 线径范围: 26~14AWG
Wire range: 26~14AWG

IEC标准 (IEC Standard)

- 1. 额定电压与电流: 250V/17.5A
Rated voltage/Rated current : 250V/17.5A
- 2. 线径范围: 0.5~1.5mm²
Wire range : 0.5~1.5mm²

NOTE 2:

- 1. 间距 (Pitch): 5.0mm
- 2. 使用温度范围: -40℃~+105℃
Operating temperature: -40℃~+105℃
- 3. 剥线长度: 5mm
Stripping length: 5mm
- 4. 符合RoHS环保要求
RoHS Compliance
- 5. 额定扭矩: 0.4N·m (3.54 Lb. in)
(Rated torque): 0.4N·m (3.54 Lb. in)
- 6. 未标注公差表
Undimensioned tolerances


间距公差 (mm)	其他尺寸公差 (mm)	公差等级
Pitch range in mm	Nominal dimension range in mm	
≤6	10	±0.10
10	24	±0.10
≤30	30	±0.15
60	100	±0.20
150	150	±0.30
≥1.00	±1.00	±1.00

订购方式 (HOW TO ORDER)

MX127V - 5.0 - □ - □ - □ - □ - □ - □ - □ - □
 型号 间距 极数 客户型号
 Series NO. Pitch Poles Customer Request

- 1. 单间距 颜色 (Color)
- 2. 蓝色 (Blue)
- 3. 黑色 (Black)
- 4. 绿色 (Green)
- 5. 橙色 (Orange)
- 6. 红色 (Red)
- 7. 黄色 (Yellow)
- 8. 白色 (White)
- 9. 透明 (Transparent)

PCB LAYOUT

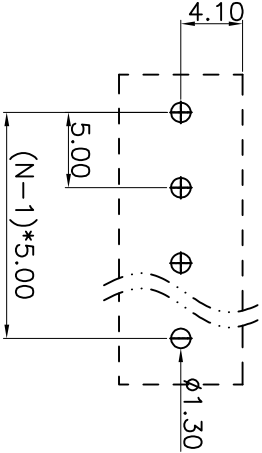

ITEM	NAME OF PART	MATERIAL	NOTES
1	(Housing) 塑件	PA66	UL94V-0
2	(Screw) 螺丝 M2.5	(Steel) 钢	(Zn plated) 镀锌
3	(Terminal) 焊针	(Copper alloy) 铜合金	(Sn plated) 镀锡
4	(Cage) 方盒	(Copper alloy) 铜合金	(Ni plated) 镀镍

PART NO.:	APPD:	CHKD:	DRFT:
/	/	/	/

<p>宁波迈科思电子科技有限公司</p> <p>NINGBO MAX ELECTRONIC TECHNOLOGY CO.,LTD</p>		
系列	MX127V-5.0	页码 1/1
图号	MX127V500001	比例 1:1