

REVISION RECORD

REV	ECN.	DESCRIPTION	DRFT	DATE

NOTE 1:

- UL标准 (UL Standard)**  
 1. 额定电压与电流: 300V/20A  
 Rated voltage/Rated current: 300V/20A  
 2. 机械耐压: AC1600V/1h  
 Withstanding Voltage: AC2000V/1h  
 3. 线径范围: 28~12AWG  
 Wire range: 28~12AWG
- IEC标准 (IEC Standard)**  
 1. 额定电压与电流: 250V/20A  
 Rated voltage/Rated current: 250V/20A  
 2. 线径范围: 2.5mm<sup>2</sup>  
 Wire range: 2.5mm<sup>2</sup>

NOTE 2:

- 间距 (Pitch): 5.00mm
- 使用温度范围: -40°C~+105°C  
Operating temperature: -40°C~+105°C
- 引线长度: 6~7mm  
Stripping length: 6~7mm
- 符合RoHS环保要求  
RoHS Compliance
- 额定扭矩: 0.8N.m 4.49 [Lb. in]  
(Rated torque): 0.8N.m 4.49 [Lb. in]
- 未标注公差按  
Unlaminated tolerances

间距公差 (mm)	公差等级 (mm)	公差等级 (mm)	公差等级 (mm)
Pitch range in mm	Nominal dimension range in mm		
≤6	10 ~ 24	≤30	60 100 150 ≥150
~10	24	~30	~60 ~100 ~150 >150
±0.15	±0.20	±0.20	±0.20 ±0.20 ±0.20 ±0.20 ±1.00 ±1.00 ±1.0






订购方式 (HOW TO ORDER)

MX129D - 5.00 - □ - □ - □ - □ - □ - □ - □ - □

型号 间距 极数 客户型号  
 Series No. Pitch Poles Customer Request

颜色 (Color)  
 1. 灰色 (Grey) 2. 蓝色 (Blue)  
 3. 黑色 (Black) 4. 绿色 (Green)  
 5. 橙色 (Orange) 6. 红色 (Red)  
 7. 黄色 (Yellow) 8. 白色 (White)  
 9. 透明 (Transparent)

1. 单间距 Single Pitch  
 2. 双间距 Double Pitch

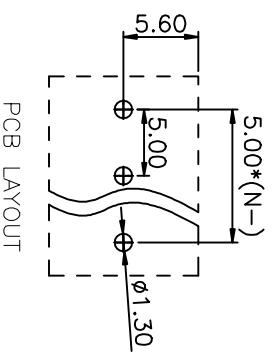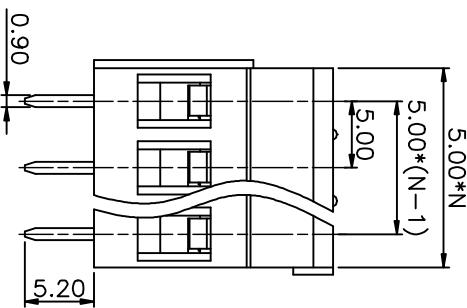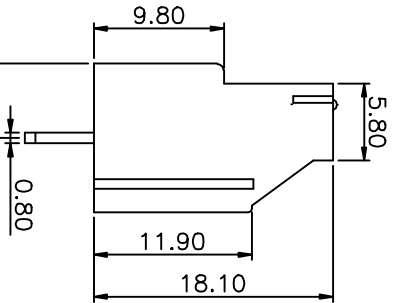

4	(Cage) 方盒	(Copper alloy) 铜合金	(Ni plated) 镀镍
3	(Contact) 触点	(Copper alloy) 铜合金	(Sn plated) 镀锡
2	(Screw) 螺丝 垫圈	(Steel) 钢	(Ni plated) 镀镍
1	(Housing) 罩件	PA66	UL94V-0
ITEM	NAME OF PART	MATERIAL	NOTES

PART NO.:		/
APPD:	APPD:	/
CHKD:	CHKD:	/
DRFT:	DRFT:	/
THIRD ANGLE PROJECTION		

<p>宁波迈科思电子科技有限公司 NINGBO MAX ELECTRONIC TECHNOLOGY CO.,LTD</p>		型号	MX129D-5.00-XXP
系列	MX129D-5.00	页码	1/1
图号	MX129500001	比例	1:1