


RoHS Compliant Customer Drawing

REV.	ECN NO.	DESCRIPTION	DATE	DESIGN

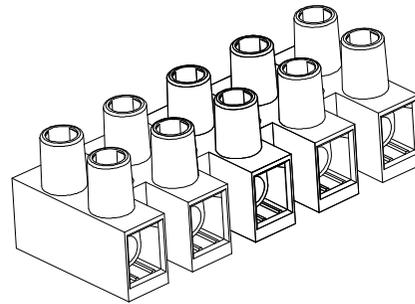

SPECIFICATION

MATERIAL

Housing:PA66,UL94V-0

Screw:M3.5 Steel ,Zinc Plated

Terminal:Brass,Ni Plated

ELECTRICAL

Rated voltage:450V



Rated current: 30A

Wire Range(MM²):2.5-10.0MM²

MECHANICAL


Strip Length: 12mm

Operating Temperature:-40°C~+105°C

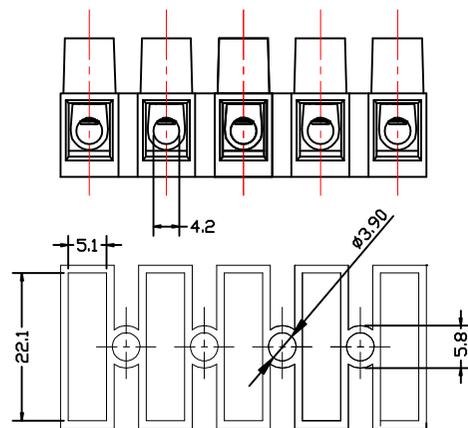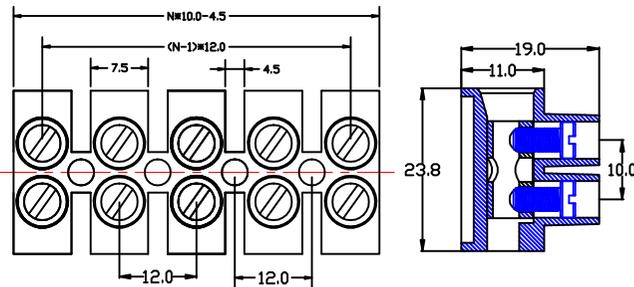

N=No.of contacts

订购方式/HOW TO ORDER

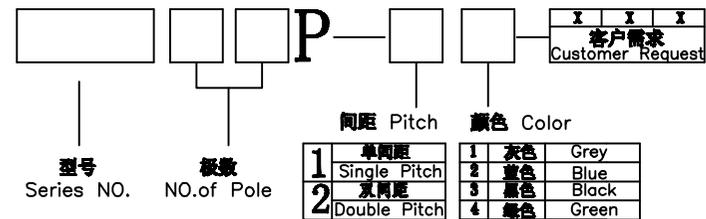

1	2
单间距	双间距
Single Pitch	Double Pitch

1	2	3	4	5	6	7	8	9
灰色	蓝色	黑色	绿色	橙色	红色	透明	黄色	白色
Grey	Blue	Black	Green	Orange	Red	Transparent	Yellow	White

CONTACT WITH US:

TEL:+86-574-63505128 FAX:+86-574-63532183

E-Mail:sales@nbmax.com.cn Website:www.nbmax.com.cn

公差一览表				宁波迈科思电子科技有限公司			
TOLERANCE UNLESS OTHERWISE				NINGBO MKX ELECTRONIC TECHNOLOGY CO.,LTD			
X.	±0.25	X°.	±5°	单位	mm	制图	陈冬梅
.X	±0.20	.X°	±2°	UNIT		DRAWING	
.XX	±0.15	.XX°	±1°	角法	ϕ	设计	顾兴伟
.XXX	±0.02	.XXX°	±0.5°	VIEW		DESIGN	
日期	2012.07.10	比例	1:1	SCALE		审核	
DATE		版本	A0	VER		核准	
		产品名称	MX12H-12.0	UNIT		产品名称	MX12H-12.0
		产品料号	MX12H-12.0	PART NO.		产品料号	MX12H-12.0
		图号	MX12H-12.0-A0	DRAW NO.		图号	MX12H-12.0-A0