

RoHS Compliant Customer Drawing

REV.	ECN NO.	DESCRIPTION	DATE	DESIGN

**SPECIFICATION**

**MATERIAL**



Housing: PA66, UL94V-0  
 Screw: M1.5 Steel, Zinc Plated  
 Terminal: Phosphor Bronze, Tin Plated  
 Clamp: Brass, Ni Plated

**ELECTRICAL**


Rated voltage: 125V  
 Rated current: 4A  
 Wire Range(AWG/MM<sup>2</sup>): 28-20AWG/0.5MM<sup>2</sup>  
 Withstanding voltage: AC1250V/1Min

**MECHANICAL**

Torque: 0.1Nm(0.9Lb-In.)  
 Strip Length: 7-8mm  
 Operating Temperature: -40°C~+105°C

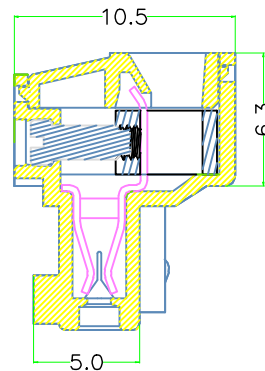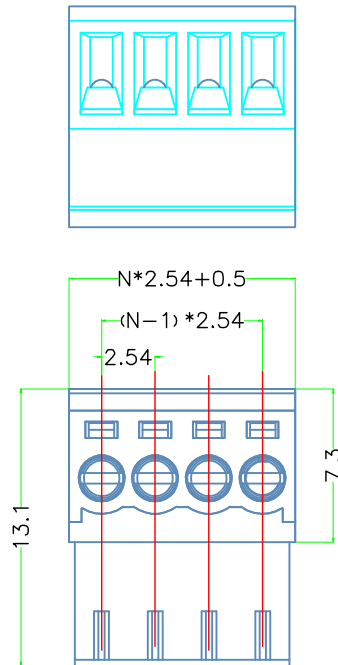

**订购方式/HOW TO ORDER**

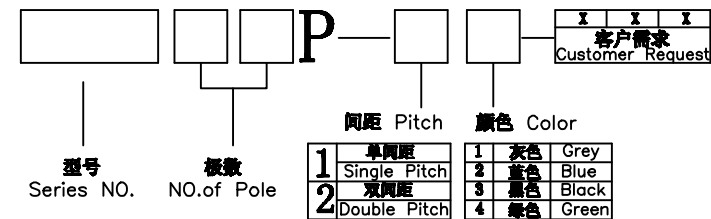

**CONTACT WITH US:**

TEL: +86-574-63505128 FAX: +86-574-63532183  
 E-Mail: sales@nbmax.com.cn Website: www.nbmax.com.cn

N = No. of contacts

公差一览表				 <b>宁波迈科思电子科技有限公司</b> NINGBO MKX ELECTRONIC TECHNOLOGY CO., LTD					
TOLERANCE UNLESS OTHERWISE				单位	制图	陈冬梅	产品名称		
X.	±0.25	X°.	±5°	UNITS	mm	陈冬梅	MX15EDGK-2.54		
.X	±0.20	.X°	±2°	角法		顾兴伟	MX15EDGK-2.54		
.XX	±0.15	.XX°	±1°	设计			MX15EDGK-2.54		
.XXX	±0.02	.XXX°	±0.5°	审核			MX15EDGK-2.54		
日期	2012.07.10	版本	A0	标准			图号	MX2EDGK-2.54-0A	
DATE		VER		APPD			DRAW NO.		