




RoHS Compliant Customer Drawing

REV.	ECN NO.	DESCRIPTION	DATE	DESIGN

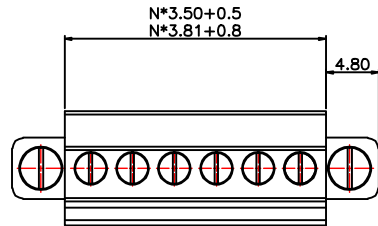

**SPECIFICATION**

**MATERIAL**



Housing:PA66,UL94V-0  
 Screw:M2 Steel,Zinc Plated  
 Terminal:Phosphor Bronze,Tin Plated  
 Clamp:Brass,Ni Plated

**ELECTRICAL**


Rated voltage:300V  
 Rated current: 8A  
 Wire Range(AWG/MM<sup>2</sup>):28-16AWG/0.5-1.5MM<sup>2</sup>  
 Withstanding voltage: AC2000V/ 1Min

**MECHANICAL**

Torque:0.2Nm(1.7Lb-In.)  
 Strip Length:7mm  
 Operating Temperature:-40°C~+105°C

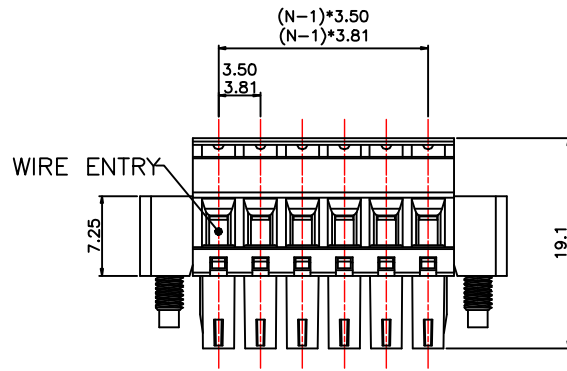

**订购方式/HOW TO ORDER**

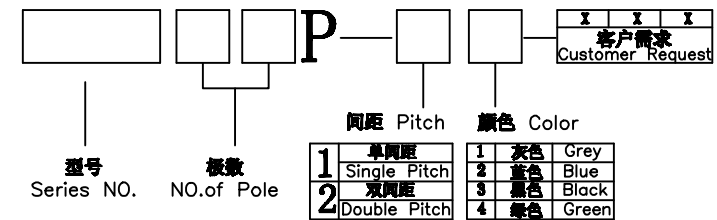

CONTACT WITH US:

TEL:+86-574-63505128 FAX:+86-574-63532183

E-Mail:sales@nbmax.com.cn Website:www.nbmax.com.cn

N=No. of contacts

公差一览表				NINGBO MKX ELECTRONIC TECHNOLOGY CO.,LTD			
TOLERANCE UNLESS OTHERWISE				NINGBO MKX ELECTRONIC TECHNOLOGY CO.,LTD			
X.	±0.25	X°.	±5°	单位	mm	制图	陈冬梅
.X	±0.20	.X°	±2°	UNIT		DRAWING	
.XX	±0.15	.XX°	±1°	角法	⊕ ⊖	设计	顾兴伟
.XXX	±0.02	.XXX°	±0.5°	VIEW		DESIGN	
日期	2012.07.10	比例	1:1	审核		CHECK	
DATE		SCALE		版本	A0	APPD	
		产品名称		图号		PART NO.	
		MX15EDGKAM-3.5/3.81		图号		DRAW NO.	
							MX15EDGKAM-3.50-A0