

RoHS Compliant Customer Drawing

REV.	ECN NO.	DESCRIPTION	DATE	DESIGN

**SPECIFICATION**

**MATERIAL**




Housing: PA66, UL94V-0  
Terminal: Phosphor Bronze, Tin Plated  
Wire Guard: Stainless Steel

**ELECTRICAL**


Rated voltage: 125V  
Rated current: 4A  
Wire Range(AWG/MM<sup>2</sup>): 28-20AWG/0.5MM<sup>2</sup>  
Withstanding voltage: AC1250V 1Min

**MECHANICAL**

Strip Length: 10mm  
Operating Temperature: -40°C~+105°C

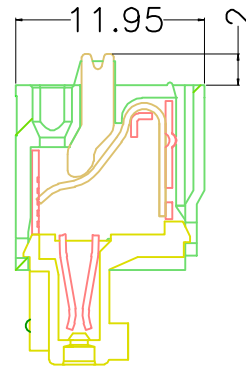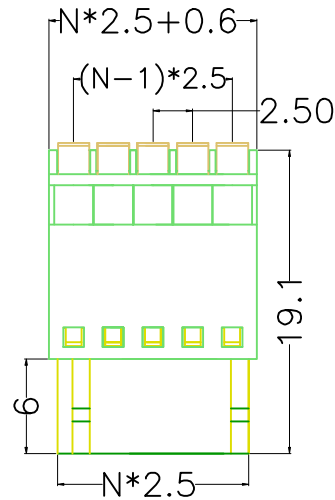

**订购方式/HOW TO ORDER**

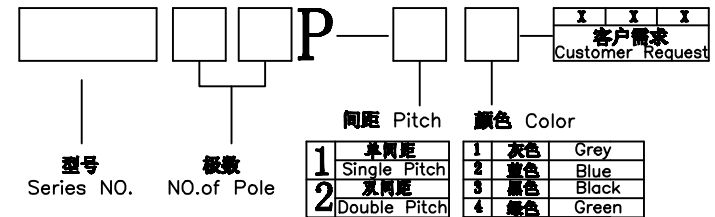

间距 Pitch	颜色 Color	
1 单间距 Single Pitch	1 灰色 Grey	2 蓝色 Blue
2 双间距 Double Pitch	3 黑色 Black	4 绿色 Green
	5 橙色 Orange	6 红色 Red
	7 透明 Transparent	8 黄色 Yellow
	9 白色 White	

CONTACT WITH US:

TEL: +86-574-63505128 FAX: +86-574-63532183

E-Mail: sales@nbmax.com.cn Website: www.nbmax.com.cn

N=No. of contacts

公差一览表 TOLERANCE UNLESS OTHERWISE				宁波迈科思电子科技有限公司 NINGBO MIX ELECTRONIC TECHNOLOGY CO.,LTD					
X.	±0.25	X°	±5°	单位 UNITS	mm	制图 DRAWING	陈冬梅	产品名称 TITLE	MX15EDGKD-2.5
.X	±0.20	.X°	±2°	角法 VIEW	⊕ ⊖	设计 DESIGN	顾兴伟	产品料号 PART NO.	MX15EDGKD-2.5
.XX	±0.15	.XX°	±1°	比例 SCALE	1:1	审核 CHECK		图号 DRAW NO.	MX2EDGKD-2.5-0A
.XXX	±0.02	.XXX°	±0.5°	日期 DATE	2012.07.10	版本 VER	A0	核准 APPD	