



RoHS Compliant Customer Drawing

REV.	ECN NO.	DESCRIPTION	DATE	DESIGN


材质及电镀 (Material)
 螺丝 (Screw): M2.5, 铜, 镀锌 (steel, zinc Plated)
 弹片 (Wire Protector): 磷青铜, 镀镍或不锈钢 (Phosphor bronze, Ni plated or stainless steel)
 焊针 (Pin header): 黄铜, 镀锡 (Brass, Tin plated)
 器件 (Housing): PA66, UL94V-0

电气性能 (Electrical)
 额定电压 (Rated Voltage): 300V
 额定电流 (Rated Current): 16A
 接触电阻 (Contact Resistance): 20mΩ
 绝缘电阻 (Insulation Resistance): 5000MΩ/1000V
 耐压 (Withstanding Voltage): AC1500V/1Min
 使用线径 (Wire Range): 22-12AWG 2.5mm²

机械性能 (Mechanical)
 温度范围 (Temperature Range): -40℃ ~ +105℃
 瞬时温度 (MAX Soldering): +250℃, 3秒 (3 Seconds)
 扭矩 (Torque): 0.5Nm (4.5lb.in)
 剥线长度 (Strip length): 6-7mm

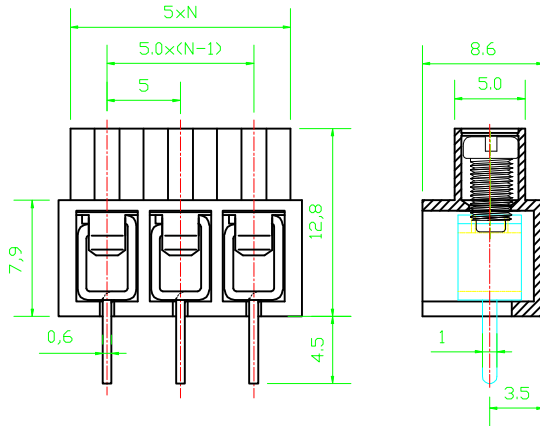

订购方式/HOW TO ORDER

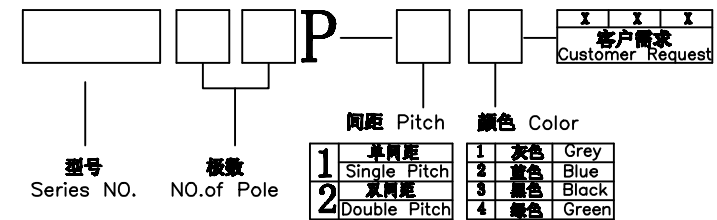

CONTACT WITH US:
 TEL: +86-574-63505128 FAX: +86-574-63532183
 E-Mail: sales@nbmax.com.cn Website: www.nbmax.com.cn

N=No. of contacts

公差一览表				宁波迈科思电子科技有限公司					
TOLERANCE UNLESS OTHERWISE				NINGBO MIX ELECTRONIC TECHNOLOGY CO.,LTD					
X.	±0.25	X°.	±5°	单位	mm	制图	陈冬梅	产品名称	MX166-5.0
.X	±0.20	.X°	±2°	角法	⊕ ⊖	设计	顾兴伟	图号	MX166-5.0
.XX	±0.15	.XX°	±1°	比例	1:1	审核		产品料号	MX166-5.0
.XXX	±0.02	.XXX°	±0.5°	日期	2012.07.10	版本	A0	图号	MX166-5.0-0A
				DATE		VER		DRAW NO.	