
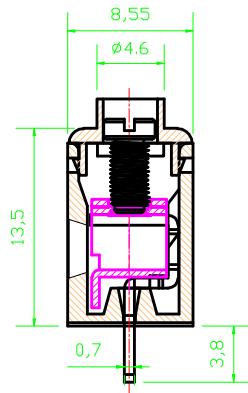
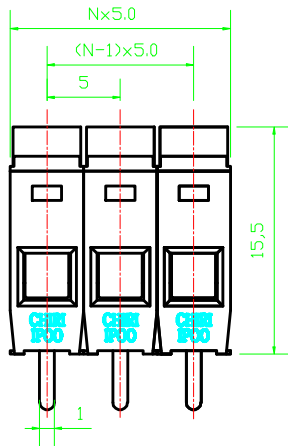


RoHS Compliant Customer Drawing

REV.	ECN NO.	DESCRIPTION	DATE	DESIGN




·材质及电镀(Material)
 螺丝(Screw):M2.5,钢,镀锌(steel, zinc Plated)
 触点(Contact):黄铜,镀镍(Bronze,NI plated)
 弹针(Pin Header):黄铜,镀锡(Bronze,Tin plated)
 器件(Housing): PA66, UL94V-0

·电气性能(Electrical)
 额定电压(Rated Voltage): 300V
 额定电流(Rated Current): 15A
 接触电阻(Contact Resistance): 20mΩ
 绝缘电阻(Insulation Resistance): 5000MΩ/1000V
 耐电压(Withstanding Voltage): AC1500V/1min
 使用线径(Wire Range): 2B-12AWG0.5- 2.5mm²

·机械性能(Mechanical)
 温度范围(Temperature Range): -40℃~ +105℃
 瞬时温度(MAX Soldering): +250℃, 5秒(5 Seconds)
 扭矩(Torque): 0.5Nm(4.5lb.in)
 剥离长度(Strip length): 5-6mm

订购方式/HOW TO ORDER

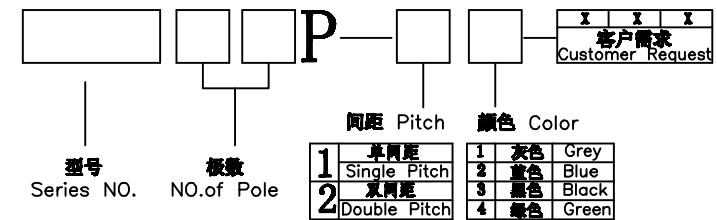

CONTACT WITH US:
 TEL:+86-574-63505128 FAX:+86-574-63532183
 E-Mail:sales@nbmax.com.cn Website:www.nbmax.com.cn

N=No.of contacts

公差一览表				宁波迈科思电子科技有限公司 NINGBO MIK ELECTRONIC TECHNOLOGY CO.,LTD			
TOLERANCE UNLESS OTHERWISE				单位	制图	陈冬梅	产品名称
X.	±0.25	X*	±5*	mm	设计	顾兴伟	MX169-5.0
.X	±0.20	.X*	±2*	角法	审核		图号
.XX	±0.15	.XX*	±1*	比例	APPD		MX169-5.0
.XXX	±0.02	.XXX*	±0.5*	版本			图号
日期	2012. 07. 10			版本	A0		图号
				版本			MX169-5.0-0A