


RoHS Compliant Customer Drawing

REV.	ECN NO.	DESCRIPTION	DATE	DESIGN
------	---------	-------------	------	--------



SPECIFICATION
MATERIAL



Housing:PA66,UL94V-0
Screw:M3 Steel ,Zinc Plated
Terminal:Phosphor Bronze,Tin Plated
Clamp:Brass,Ni Plated

ELECTRICAL




Rated voltage:300V
Rated current: 15A
Wire Range(AWG/MM²):24-12AWG/0.2-2.5MM²
Withstanding voltage: AC4000V/ 1Min

MECHANICAL

Torque:0.4Nm(3.5Lb-In.)
Strip Length:7mm
Operating Temperature:-40°C~+105°C




WIRE ENTRY



POLARIZATION KEY SLOT

订购方式/HOW TO ORDER

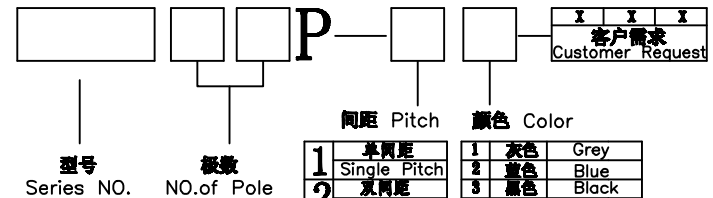


间距 Pitch		颜色 Color	
1	单间距 Single Pitch	1	灰色 Grey
2	双间距 Double Pitch	2	蓝色 Blue
		3	黑色 Black
		4	绿色 Green
		5	橙色 Orange
		6	红色 Red
		7	透明 Transparent
		8	黄色 Yellow
		9	白色 White

CONTACT WITH US:

TEL:+86-574-63505128 FAX:+86-574-63532183

E-Mail:sales@nbmax.com.cn Website:www.nbmax.com.cn

N=No. of contacts

公差一览表 TOLERANCE UNLESS OTHERWISE					 宁波迈科思电子科技有限公司 NINGBO MIX ELECTRONIC TECHNOLOGY CO.,LTD				
X.	±0.25	X°.	±5°	单位 UNITS	mm	制图 DRAWING	陈冬梅	产品名称 TITLE	MX2EDGKA-7.5/7.62
.X	±0.20	.X°.	±2°	角法 VIEW	第一角法	设计 DESIGN	顾兴伟	产品料号 PART NO.	MX2EDGKA-7.5/7.62
.XX	±0.15	.XX°.	±1°	比例 SCALES	1:1	审核 CHECK		图号 DRAW NO.	MX2EDGKA-7.5-0A
.XXX	±0.02	.XXX°.	±0.5°	日期 DATE	2012.07.10	版本 VER	A0	核准 APPD	