
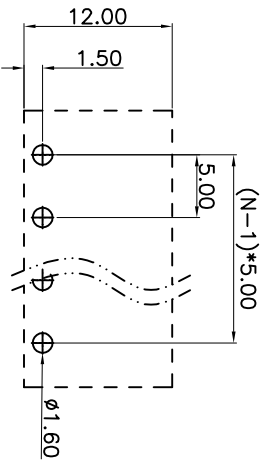




REVISION RECORD			
REV	ECN.	DESCRIPTION	DRFT DATE

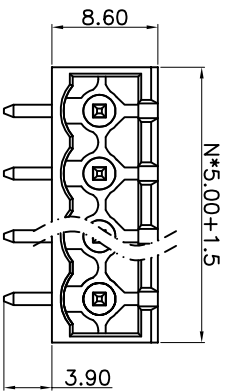

PCB LAYOUT

N=No.of contacts

2	(Pin header) 焊脚	(Copper alloy) 铜合金	(Sn plated) 镀锡	
1	(Housing) 塑件	PA66	UL94V-0	
ITEM	NAME OF PART	MATERIAL	NOTES	

NOTE 1:
UL标准 (UL Standard)
1. 额定电压与电流: 300V/15A
Rated voltage/Rated current: 300V/15A

2. 功频耐压: AC1600V/Min
Withstanding Voltage: AC1600V/Min
IEC标准 (IEC Standard)
1. 额定电压与电流: 320V/20A
Rated voltage/Rated current: 320V/20A

NOTE 2:
1. 间距 (Pitch): 5.0mm
2. 使用温度范围: -40°C~+105°C
Operating temperature: -40°C~+105°C
3. 符合RoSH环保要求
RoHS Compliance
5. 未标注公差表
Undimensioned tolerances

矩形公差 (mm)	其他尺寸公差 (mm)	公差带
Pitch range in mm	Normalized dimension range in mm	$\frac{1}{D}$
≤6	6 ~ 10	≤30
10 ~ 24	30 ~ 60	100
±0.15	±0.20	±0.30
±0.30	±0.50	±0.70
±1.00	±1.50	±1.00
		±1*

订购方式 (HOW TO ORDER)
MX2EDGRC-5.0-□-□-□-□-□-□-□
型号 间距 极数 客户型号
Series NO. Pitch Poles Customer Request

- 颜色 (Color)
1. 灰色 (Gray) 2. 蓝色 (Blue)
3. 黑色 (Black) 4. 绿色 (Green)
5. 橙色 (Orange) 6. 红色 (Red)
7. 黄色 (Yellow) 8. 白色 (White)
9. 透明 (Transparent)



宁波迈科思电子科技有限公司
NINGBO MAX ELECTRONIC TECHNOLOGY CO., LTD

PART NO.:	/	系列	MX2EDGRC-5.0	页码	1/1
APPD:	/	图号	MX2EDGRC500001	比例	1:1
CHKD:	/	THIRD ANGLE PROJECTION			
DRTT:	/				