
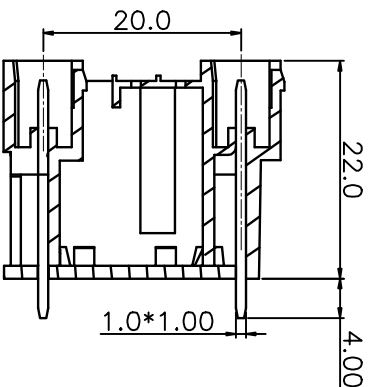


REVISION RECORD			
REV	ECN.	DESCRIPTION	DRFT DATE

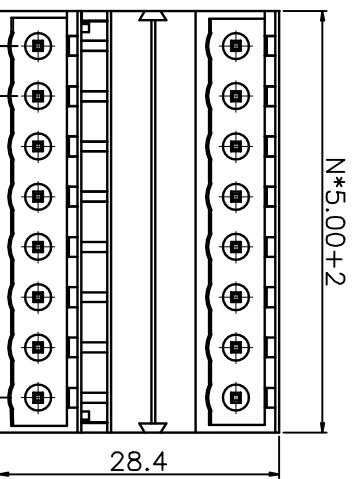

NOTE 1:
UL标准 (UL Standard)
1. 额定电压与电流: 300V/15A
Rated voltage/Rated current: 300V/15A
2. 功耐耐压: AC1600V/Min
Withstanding Voltage: AC1600V/Min

IEC标准 (IEC Standard)
1. 额定电压与电流: 320V/10A
Rated voltage/Rated current: 320V/10A

NOTE 2:
1. 间距 (Pitch): 5.00mm
2. 使用温度范围: -40°C~+105°C
Operating temperature: -40°C~+105°C
3. 符合RoHS环保要求
RoHS Compliance
4. 未标注公差表
Undimensioned tolerances


额定公差 (mm)	实际公差 (mm)	公差带
Pitch range in mm	Nominal dimension range in mm	±T
≤6	~ 10	±0.1/0
~ 10	~ 24	±0.15
≤30	~ 60	±0.20
~ 60	~ 100	±0.30
~ 100	~ 150	±0.50
~ 150	~ 180	±0.70
~ 180	~ 1000	±1.00
		±1"

订购方式 (HOW TO ORDER)
MX2EDGVH - 5.00 - □P - □ - □ - □□□□

型号 间距 数量
Series NO. Pitch Poles
客户型号
Customer Request

- 颜色 (Color)
1. 灰色 (Grey) 2. 蓝色 (Blue)
3. 黑色 (Black) 4. 绿色 (Green)
5. 橙色 (Orange) 6. 红色 (Red)
7. 黄色 (Yellow) 8. 白色 (White)
9. 透明 (Transparent)

1. 单间距
Single Pitch
2. 双间距
Double Pitch

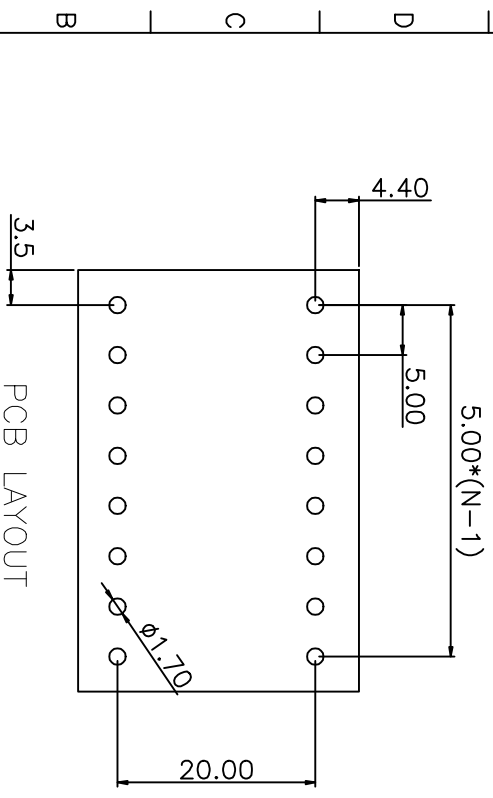

PCB LAYOUT

ITEM	NAME OF PART	MATERIAL	NOTES
1	(Housing) 器件	PA66	UL94V-0
2	(Contact) 触点	(Copper alloy) 铜合金	(Sn plated) 镀锡

PART NO.: /		THIRD ANGLE PROJECTION	
APPD: /	CHKD: /	DRFT: /	
NINGBO MAX ELECTRONIC TECHNOLOGY CO.,LTD		型号	页码
		MX2EDGVH-5.00-XXX	1/1
		系列	比例
		MX2EDGVH-5.00	1:1
		图号	
		MX2EDGVH500001	

宁波迈科思电子科技有限公司
NINGBO MAX ELECTRONIC TECHNOLOGY CO.,LTD