

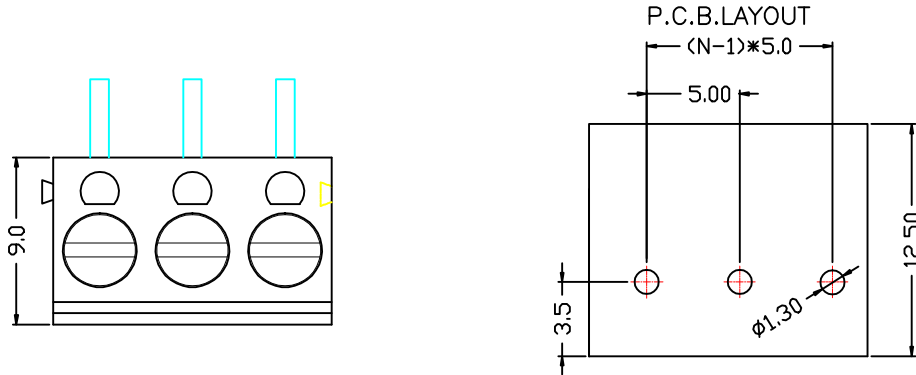


RoHS Compliant Customer Drawing


REV.	ECN NO.	DESCRIPTION	DATE	DESIGN

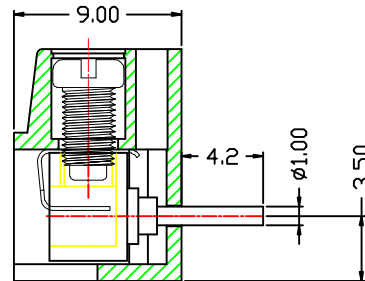

- 材质及电镀(Material)**
  - 螺丝(Screw): M3, 铜, 镀锌(steel, zinc Plated)
  - 弹片(Wire Protector): 磷青铜, 镀镍或不锈钢(Phosphor bronze, Ni plated or stainless steel)
  - 焊针(Pin header): 黄铜, 镀锡(Brass, Tin plated)
  - 塑件(Housing): PBT, UL94V-0
- 电气性能(Electrical)**
  - 额定电压(Rated Voltage): 300V
  - 额定电流(Rated Current): 12A
  - 接触电阻(Contact Resistance): 20mΩ
  - 绝缘电阻(Insulation Resistance): 5000MΩ/1000V
  - 耐电压(Withstanding Voltage): AC1500V/1Min
  - 使用线径(Wire Range): 22-14AWG 2.5mm<sup>2</sup>
- 机械性能(Mechanical)**
  - 温度范围(Temperature Range): -30℃~+120℃
  - 瞬时温度(MAX Soldering): +250℃, 5秒(5 Seconds)
  - 扭矩(Torque): 0.4Nm(3.6lb.in)
  - 剥线长度(Strip length): 4.5-5mm

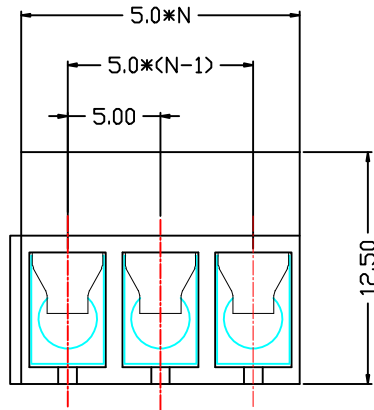

### 订购方式/HOW TO ORDER

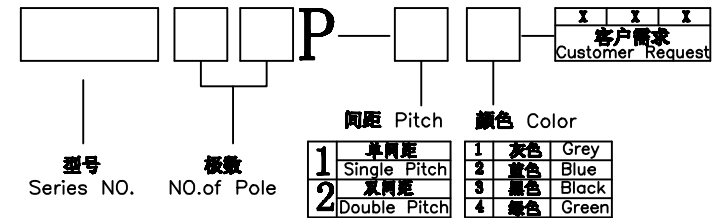

CONTACT WITH US:  
 TEL: +86-574-63505128 FAX: +86-574-63532183  
 E-Mail: sales@nbmax.com.cn Website: www.nbmax.com.cn

N=No. of contacts

公差一览表				宁波迈科思电子科技有限公司					
TOLERANCE UNLESS OTHERWISE				NINGBO MIX ELECTRONIC TECHNOLOGY CO.,LTD					
X.	±0.25	X°.	±5°	单位	mm	制图	陈冬梅	产品名称	MX300R-5.0
.X	±0.20	.X°.	±2°	UNITS		DRAWING		TITLE	
.XX	±0.15	.XX°.	±1°	角法	⊕ ⊖	设计	顾兴伟	图号	MX300R-5.0
.XXX	±0.02	.XXX°.	±0.5°	比例	1:1	审核		产品料号	MX300R-5.0
日期	2012.07.10			版本	A0	核准		图号	MX300R-5.0-0A
DATE				VER		APPD		DRAW NO.	