





RoHS Compliant Customer Drawing

REV.	ECN NO.	DESCRIPTION	DATE	DESIGN

P.C.B.LAYOUT



N=Number of contacts

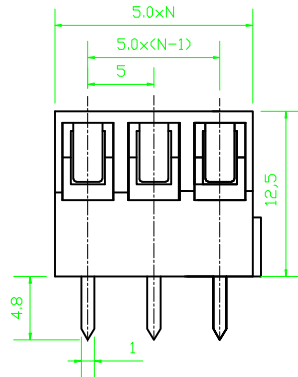


·材质及电镀(Material)
 螺丝(Screw):M2.5,铜,镀锌(steel, zinc Plated)
 触点(Contact):黄铜,镀镍(Bronze, Ni plated)
 焊针(Pin header):黄铜,镀锡(Bronze,Tin plated)
 塑件(Housing): PA66, UL94V-0

·电气性能(Electrical)
 额定电压(Rated Voltage): 300V
 额定电流(Rated Current): 16A
 接触电阻(Contact Resistance): 20mΩ
 绝缘电阻(Insulation Resistance): 5000MΩ/1000V
 耐电压(Withstanding Voltage): AC1500V/1min
 使用线径(Wire Range): 12-22AWG 2.5mm²

·机械性能(Mechanical)
 温度范围(Temperature Range): -30℃~+120℃
 瞬时温度(MAX Soldering): +250℃, 5秒(5 Seconds)
 扭矩(Torque): 0.4Nm(3.6lb.in)
 剥线长度(Strip length): 4.5-5mm

订购方式/HOW TO ORDER

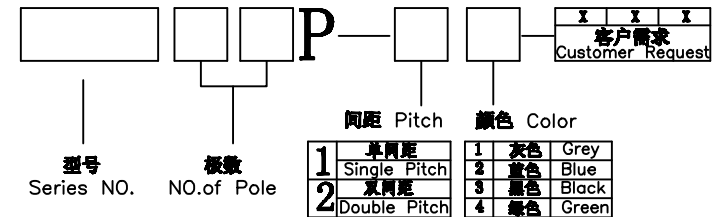

CONTACT WITH US:
 TEL:+86-574-63505128 FAX:+86-574-63532183
 E-Mail:sales@nbmax.com.cn Website:www.nbmax.com.cn

N=No.of contacts

公差一览表				宁波迈科思电子科技有限公司					
TOLERANCE UNLESS OTHERWISE				NINGBO MIX ELECTRONIC TECHNOLOGY CO.,LTD					
X.	±0.25	X*	±5°	单位	mm	制图	陈冬梅	产品名称	MX330-5.0
.X	±0.20	.X*	±2°	UNITS		DRAWING		图号	
.XX	±0.15	.XX*	±1°	角法		设计	顾兴伟	图号	
.XXX	±0.02	.XXX*	±0.5°	VIEW		DESIGN		产品料号	MX330-5.0
日期	2012.07.10	DATE		比例	1:1	审核		PART NO.	MX330-5.0
				SCALE		CHEK		图号	MX330-5.0-A0
				版本	A0	核准		DRAW NO.	
				VER		APPD			