




RoHS Compliant

Customer Drawing

REV.	ECN NO.	DESCRIPTION	DATE	DESIGN




材料及电镀 (Material)
 螺钉 (Screw): M2.5, 铜, 镀锌 (steel, zinc Plated)
 弹片 (Wire/Pin): 磷青铜, 镀锌
 (Phosphor bronze, Ni plated)
 触点 (Contact): 黄铜, 镀锌 (Brass, Ni plated)
 盖件 (Housing): PA66, UL94V-0

电气性能 (Electrical)
 额定电压 (Rated Voltage): 300V
 额定电流 (Rated Current): 16A
 接触电阻 (Contact Resistance): 20mΩ
 绝缘电阻 (Insulation Resistance): 500MΩ/1000V
 耐压 (Withstanding Voltage): AC1500V/1Min
 使用线径 (Wire Range): 28-16AWG 2.5mm²

机械性能 (Mechanical)
 温度范围 (Temperature Range): -40℃~+105℃
 焊接温度 (MAX Soldering): +250℃, 5秒 (5 Seconds)
 扭力 (Torque): 0.4Nm (3.6lb.in)
 引脚长度 (Strip length): 4.5-6mm

订购方式/HOW TO ORDER

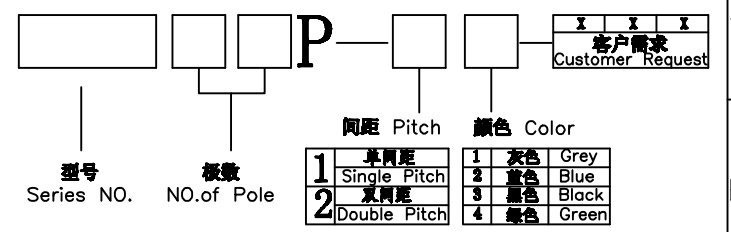

CONTACT WITH US:
 TEL:+86-574-63505128 FAX:+86-574-63532183
 E-Mail:sales@nbmax.com.cn Website:www.nbmax.com.cn

N=No.of contacts

公差一览表 TOLERANCE UNLESS OTHERWISE				宁波迈科思电子科技有限公司 NINGBO MIX ELECTRONIC TECHNOLOGY CO.,LTD					
X.	±0.25	X*	±5°	单位 UNITS	mm	制图 DRAWING	陈冬梅	产品名称 TITLE	MX331-5.0
.X	±0.20	.X*	±2°	角法 VIEW	第一角画法	设计 DESIGN	顾兴伟	产品料号 PART NO.	MX331-5.0
.XX	±0.15	.XX*	±1°	比例 SCALE	1:1	审核 CHECK		图号 DRAW NO.	MX331-5.0-0A
.XXX	±0.02	.XXX*	±0.5°	日期 DATE	2012.07.10	版本 VER	A0	批准 APPD	