




RoHS Compliant

Customer Drawing


REV.	ECN NO.	DESCRIPTION	DATE	DESIGN

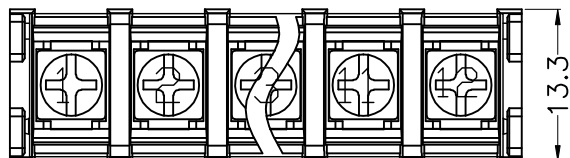

- 材质及电镀(Material)
 塑件(Housing): PA66, UL94V-0
 端子(Terminal): 黄铜, 0.7t 镀锡(Brass, Tin plated)
 螺丝(Screw): M3, 钢, 镀锌(Steel, Ni-Plated)
- 电气性能(Electrical)
 额定电压(Rated Voltage): 300V
 额定电流(Rated Current): 20A
 绝缘电阻(Insulation Resistance): 500MΩ/DC500V
 耐电压(Withstanding Voltage): AC2000V/Min
- 机械性能(Mechanical)
 温度范围(Temperature Range): -40℃~ +105℃
 适用线径(Wire Range): 22-14AWG
 最大扭矩值(Max.Torque Value): 0.5N.m 4.4Lb.in

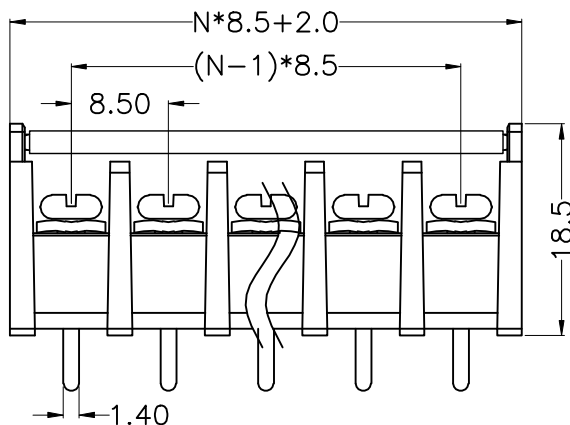


订购方式/HOW TO ORDER

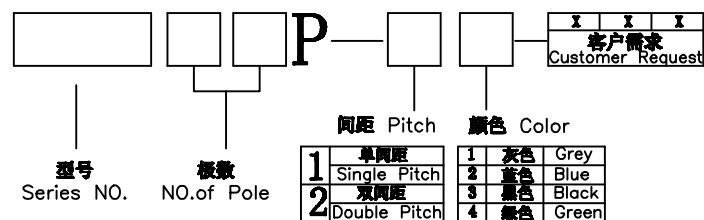

CONTACT WITH US:
 TEL:+86-574-63505128 FAX:+86-574-63532183
 E-Mail:sales@nbmax.com.cn Website:www.nbmax.com.cn

N=No.of contacts

公差一览表				 宁波迈科思电子科技有限公司 NINGBO MKX ELECTRONIC TECHNOLOGY CO.,LTD					
TOLERANCE UNLESS OTHERWISE				单位	制图	审核	产品名称	MX35CG-8.50	
X.	±0.25	X*	±5*	UNIT	mm	陈冬梅	TITLE		
.X	±0.20	.X*	±2*	角法	设计	顾兴伟			
.XX	±0.15	.XX*	±1*	VIEW	DESIGN				
.XXX	±0.02	.XXX*	±0.5*	比例	1:1	审核	产品料号	MX35CG-8.50	
日期	2012.07.10			SCALE	1:1	核准	PART NO.	MX35CG-8.50	
DATE				版本	A0	APPD	图号	MX35CG-8.5-0A	
				VER			DRAW NO.		