

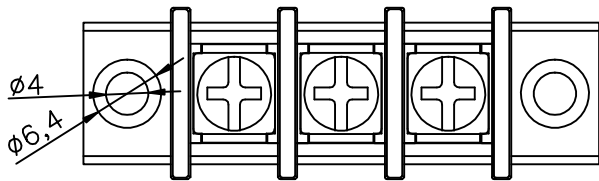


RoHS Compliant Customer Drawing

| REV. | ECN NO. | DESCRIPTION | DATE | DESIGN |
|------|---------|-------------|------|--------|
|      |         |             |      |        |

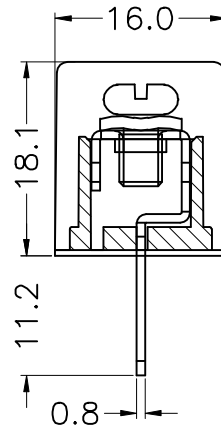


- 材质及电镀(Material)  
 塑件(Housing): PA66, UL94V-0  
 端子(Terminal): 黄铜, 0.8t 镀锡(Brass, Tin plated)  
 螺丝(Screw): M4, 钢, 镀锌(Steel, Ni-Plated)
- 电气性能(Electrical)  
 额定电压(Rated Voltage): 300V  
 额定电流(Rated Current): 25A  
 绝缘电阻(Insulation Resistance): 500MΩ/DC500V  
 耐电压(Withstanding Voltage): AC2000V/Min

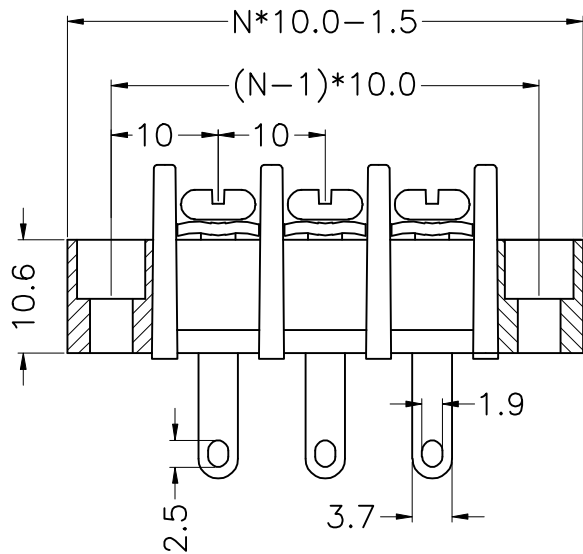


- 机械性能(Mechanical)  
 温度范围(Temperature Range): -40℃~ +105℃  
 适用线径(Wire Range): 22-14AWG  
 最大扭矩(Max.Torque Value): 0.5N.m 4.4Lb.in

订购方式/HOW TO ORDER

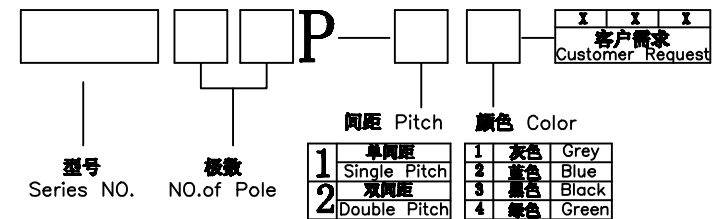

CONTACT WITH US:  
 TEL:+86-574-63505128 FAX:+86-574-63532183  
 E-Mail:sales@nbmax.com.cn Website:www.nbmax.com.cn

N=No.of contacts

| 公差一览表                      |            |       |       |  <b>宁波迈科思电子科技有限公司</b><br>NINGBO MKX ELECTRONIC TECHNOLOGY CO.,LTD |        |      |      |            |               |
|----------------------------|------------|-------|-------|--|--------|------|------|------------|---------------|
| TOLERANCE UNLESS OTHERWISE |            |       |       | 单位   | 制图     | 陈冬梅  | 产品名称 | MX55H-10.0 |               |
| X.                         | ±0.25      | X*    | ±5°   | UNIT   | mm     | 设计   | 顾兴伟  | 图号         | MX55H-10.0    |
| .X                         | ±0.20      | .X*   | ±2°   | 角法   | 第一角法   | 审核   |      | 产品序号       | MX55H-10.0    |
| .XX                        | ±0.15      | .XX*  | ±1°   | VIEW   | DESIGN | APPD |      | PART NO.   | MX55H-10.0    |
| .XXX                       | ±0.02      | .XXX* | ±0.5° | 比例   | 1:1    |      |      | 图号         | MX55H-10.0-0A |
| 日期                         | 2012.07.10 |       |       | 版本   | A0     | 核准   |      | 图号         | MX55H-10.0-0A |
| DATE                       |            |       |       | VER  |        | APPD |      | DRAW NO.   |               |