



RoHS Compliant Customer Drawing


REV.	ECN NO.	DESCRIPTION	DATE	DESIGN

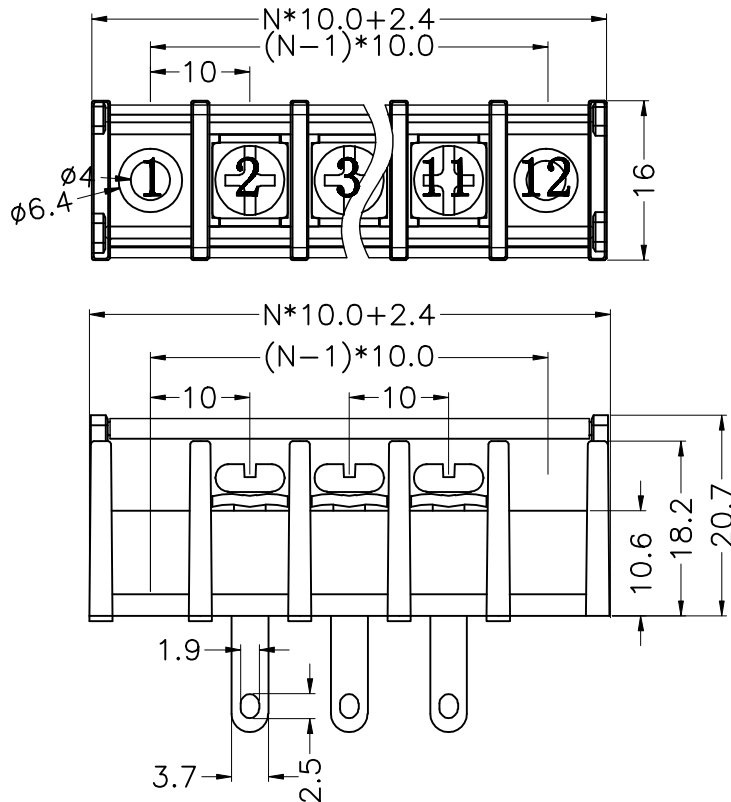

- 材质及电镀(Material)
 塑件(Housing): PA66, UL94V-0
 端子(Terminal): 黄铜, 0.8t 镀锡(Brass, Tin plated)
 螺丝(Screw): M4, 钢, 镀锌(Steel, Ni-Plated)
- 电气性能(Electrical)
 额定电压(Rated Voltage): 300V
 额定电流(Rated Current): 25A
 绝缘电阻(Insulation Resistance): 500MΩ/DC500V
 耐电压(Withstanding Voltage): AC2000V/Min
- 机械性能(Mechanical)
 温度范围(Temperature Range): -40℃~ +105℃
 适用线径(Wire Range): 22-14AWG
 最大扭矩值(Max.Torque Value): 0.5N.m 4.4Lb.in

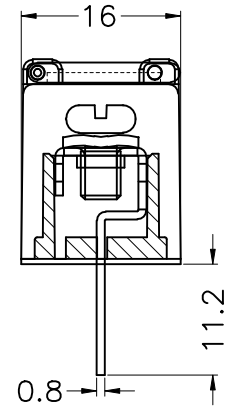

订购方式/HOW TO ORDER

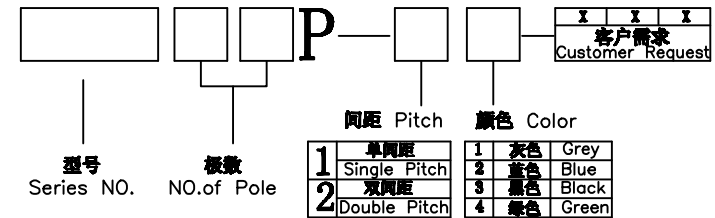

CONTACT WITH US:
 TEL:+86-574-63505128 FAX:+86-574-63532183
 E-Mail:sales@nbmax.com.cn Website:www.nbmax.com.cn

N=No.of contacts

公差一览表				宁波迈科思电子科技有限公司					
TOLERANCE UNLESS OTHERWISE				NINGBO MKX ELECTRONIC TECHNOLOGY CO.,LTD					
X.	±0.25	X°.	±5°	单位	mm	制图	陈冬梅	产品名称	MX55HG-10.0
.X	±0.20	.X°.	±2°	UNITS		DRAWING		TM	
.XX	±0.15	.XX°.	±1°	角法	⊕	设计	顾兴伟		
.XXX	±0.02	.XXX°.	±0.5°	VIEW		DESIGN			
日期	2012.07.10			比例	1:1	审核		产品料号	MX55HG-10.0
DATE				SCALE		CHEK		PART NO.	
				版本	A0	核准		图号	MX55HG-10.0-0A
				VER		APPD		DRAW NO.	