
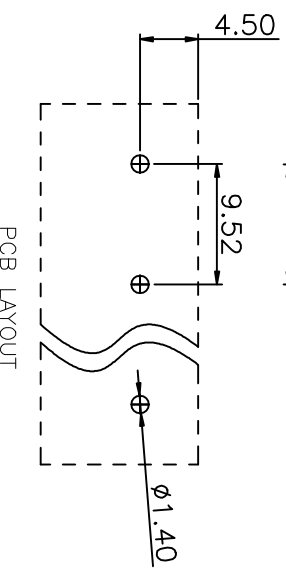
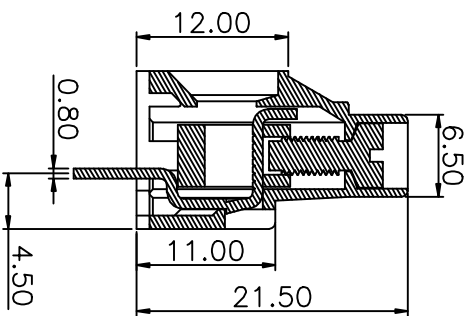
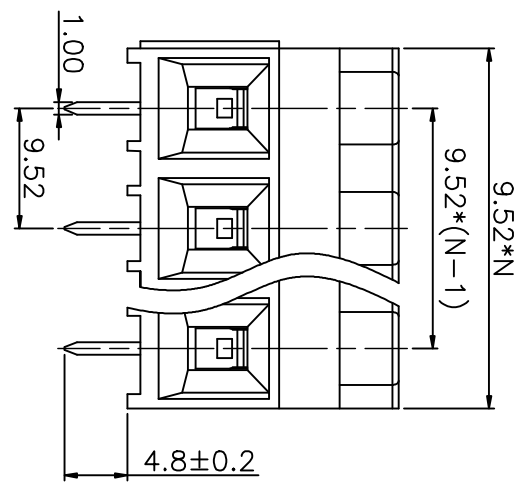


2		REVISION RECORD		1
REV	ECN.	DESCRIPTION	DRFT	DATE

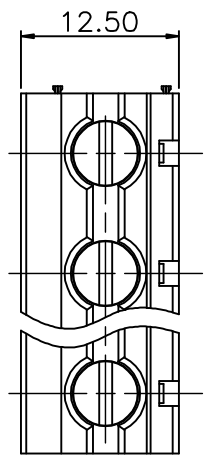

**NOTE 1:**  
UL标准 (UL Standard)

1. 额定电压与电流: 300V/30A  
Rated voltage/Rated current: 300V/30A
2. 额定耐压: AC2500V/Min  
Withstanding Voltage: AC2500V/Min
3. 线径范围: 28~10AWG  
Wire range: 28~10AWG

**IEC标准 (IEC Standard)**

1. 额定电压与电流: 1000V/32A  
Rated voltage/Rated current: 1000V/32A
2. 线径范围: 0.2~4.0mm<sup>2</sup>  
Wire range: 0.2~4.0mm<sup>2</sup>

**NOTE 2:**

1. 间距 (Pitch): 9.52mm
2. 使用温度范围: -40℃~+105℃  
Operating temperature: -40℃~+105℃
3. 引线长度: 8mm  
Stripping Length: 8mm
4. 符合RoHS环保要求  
RoHS Compliance
5. 额定扭矩: 0.8N.m 4.43[lb. in]  
(Rated torque): 0.8N.m 4.43[lb. in]
6. 未标注公差按  
Unlaminated tolerances

间距 (mm)	公称尺寸范围 (mm)	公差
≤6	~ 10	±0.1/0
~ 10	~ 24	±0.15
~ 30	~ 60	±0.20
~ 60	~ 100	±0.30
~ 150	~ 150	±0.70
≥ 150	±1.00	±1.00

**订购方式 (HOW TO ORDER)**

MX635 - 9.52 - □ - □ - □ - □ - □ - □ - □ - □

型号 间距 数量      客户型号  
Series No. Pitch Poles      Customer Request

颜色 (Color)

1. 单间距 Single Pitch      1. 灰色 (Grey)    2. 蓝色 (Blue)  
2. 黑色 (Black)    3. 绿色 (Green)  
4. 棕色 (Brown)    5. 黄色 (Yellow)    6. 红色 (Red)  
7. 白色 (White)    8. 透明 (Transparent)

4	(Cage) 方盒	(Copper alloy) 铜合金	(Ni plated) 镀镍
3	(Contact) 触点	(Copper alloy) 铜合金	(Sn plated) 镀锡
2	(Screw) 螺丝	(Steel) 钢	(Ni plated) 镀镍
1	(Housing) 罩件	PA66	UL94V-0
ITEM	NAME OF PART	MATERIAL	NOTES

PART NO.:	/	THIRD ANGLE PROJECTION	/
APPD:	/		
CHKD:	/		
DRFT:	/		

型号	MX635-9.52-XXP	页码	1/1
系列	MX635-9.52	图号	MX635952001
比例			1:1

宁波迈科思电子科技有限公司  
NINGBO MAX ELECTRONIC TECHNOLOGY CO.,LTD

A B C D E F G H

8 7 6 5 4 3 2 1

A B C D E F G H

8 7 6 5 4 3 2 1